



OPTIONAL EQUIPMENT: Reclinable trellis jib 6,2 / 12 m

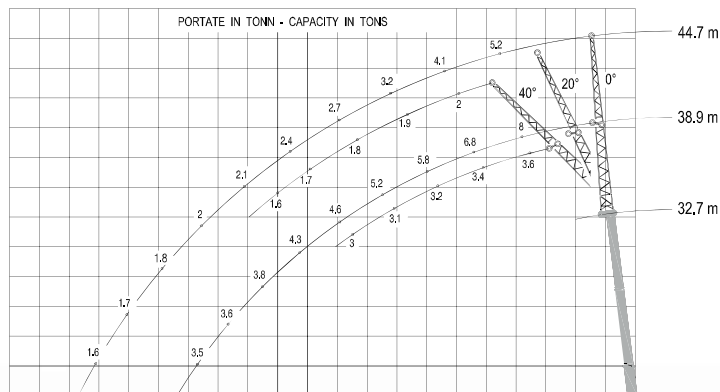


Divisible counterweight with automatic unloading




Three position reclinable boom head



Primary winch



Double winch



0,5 meters hook for reclinable boom head




1,5 meters hook or pulley for reclinable boom head




Hook blocks of various capacities



3 meters trellis jib



3,7 meters lift spreader beams



The lifting capacities in the structural area are based on DIN 15018 part 3 / FEM 5.004 / EN 13000.
The lifting capacities in the stability area are based on DIN 15019 part 2 / ISO 4305 / EN 13000

